


HRC 500 XL / 510 XL - Extended Position & Transition Coupler

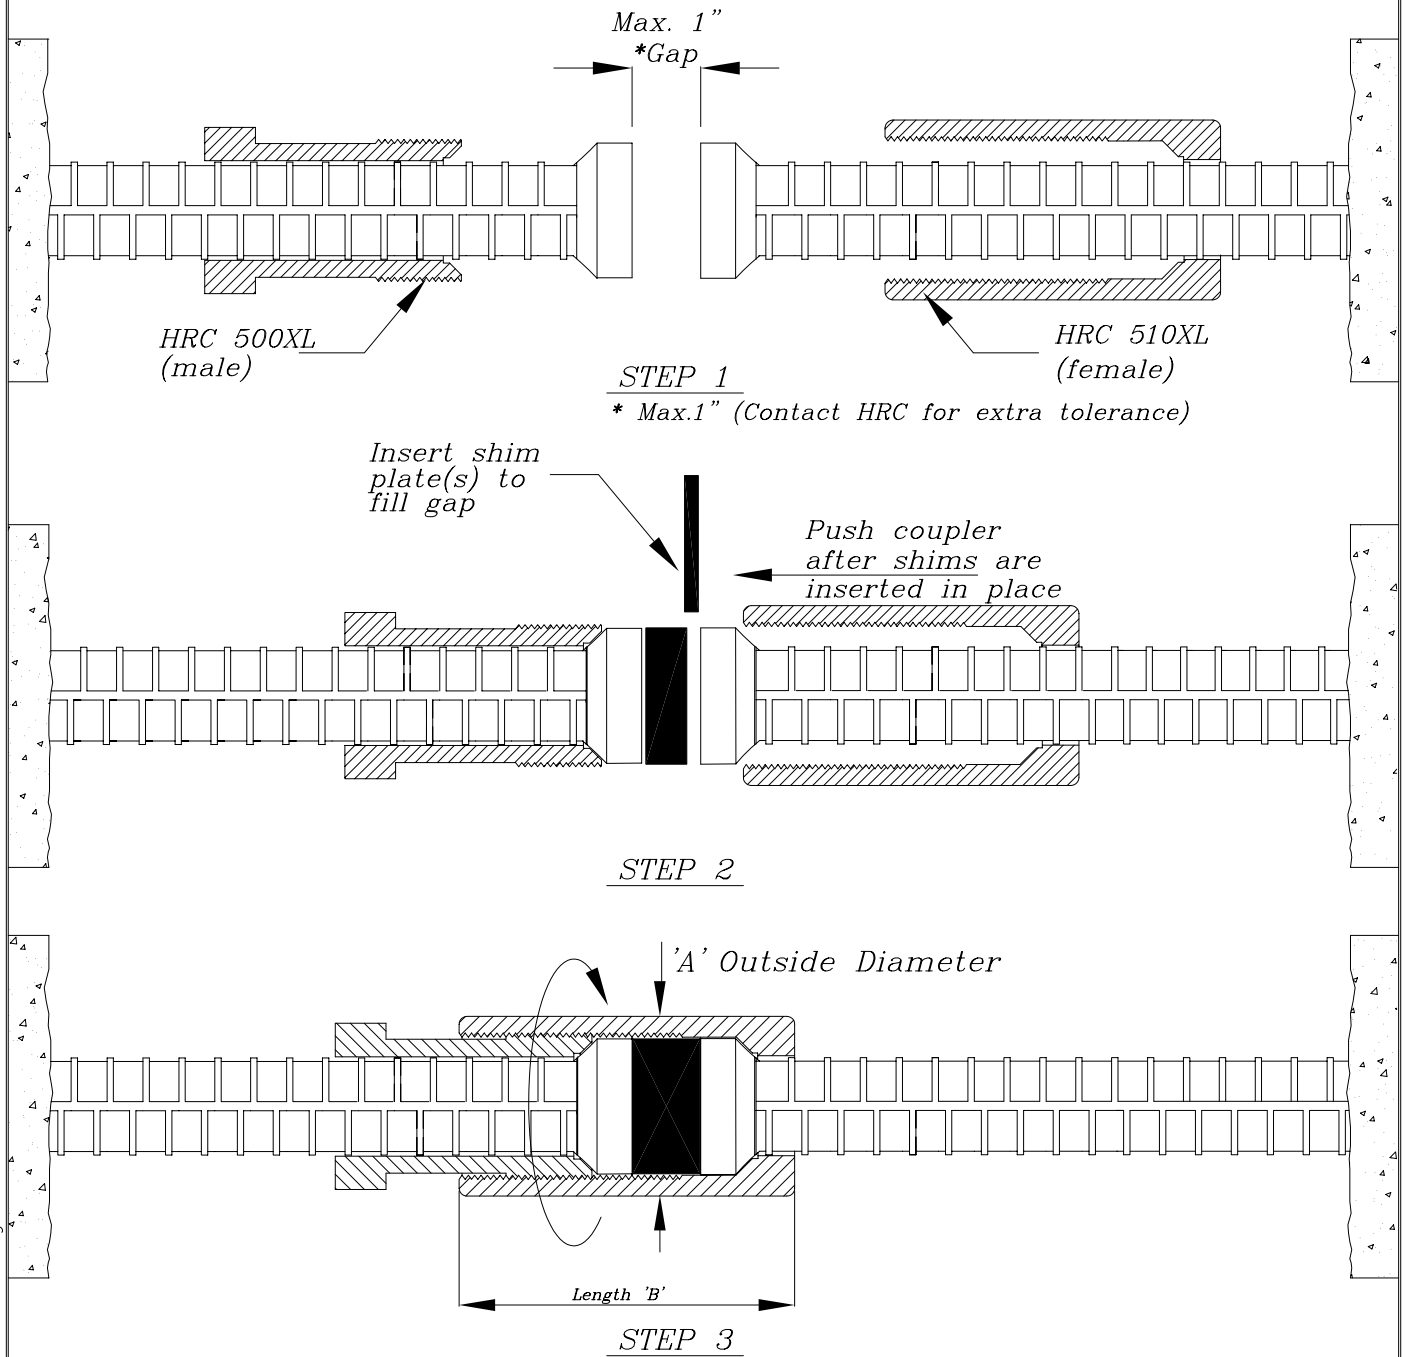

Shims not required for tension only applications (such as hoops).

HRC 510 XL Dimensions	#4 in.	#13 mm	#5 in.	#16 mm	#6 in.	#19 mm	#7 in.	#22 mm	#8 in.	#25 mm	#9 in.	#29 mm	#10 in.	#32 mm	#11 in.	#36 mm	#14 in.	#43 mm
A. Coupler OD	1 1/4	32	1 1/2	38	1 5/8	41	1 7/8	48	2 1/8	54	2 3/8	60	2 5/8	67	2 7/8	73	3 1/2	89
B. Coupler length	2 1/4	55	2 1/2	64	2 3/4	70	3 1/8	79	3 3/8	84	3 1/2	90	3 3/4	97	4 1/2	114	5 1/2	140

Note: Shim plate thickness are made available at 1/2", 3/8", 1/4", 1/8", and 1/16".

6/16/15

All data subject to change without notice.



HEADED REINFORCEMENT CORP.
 11200 Condor Avenue • Fountain Valley, CA 92708
 Tel: (714) 557-1455 • Fax: (714) 557-4460